

88 5029 88


Bar Stool

IMPORTANT NOTE


Carefully remove all the parts from the carton and put them individually on a soft cloth to prevent scratches or other damage occurring to the parts.

We have taken great care in the design of this product and request that you carefully and strictly follow our assembly instructions to ensure a completed product as it was designed.

Home
Styles

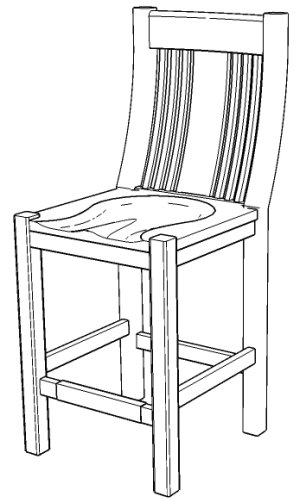

Part List

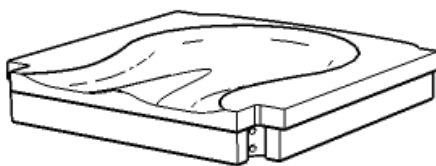

A.
Seat
1 Pc.




B.
Leg
1 Pc.




C.
Leg
1 Pc.



D.
Stretcher
1 Pc.



E.
Stretcher
2 Pcs.

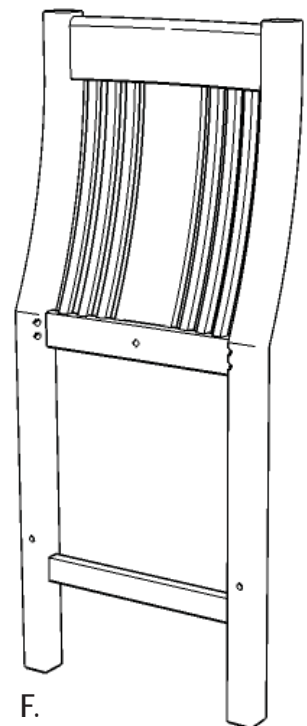


F.
Back Frame
1 Pc.


Hardware List



Small Hex Wrench
1 Pc.




M6x38
Head Cap Bolt (short)
1 Pc. (+1 extra)




M6x51
Head Cap Bolt (middle)
4 Pcs. (+1 extra)



Spring Washer
9 Pcs. (+1 extra)



Hex Wrench
1 Pc.

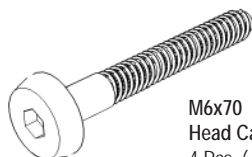

M6x70
Head Cap Bolt (long)
4 Pcs. (+1 extra)



Flat Washer
9 Pcs. (+1 extra)



Wood Screw
6 Pcs. (+1 extra)

Tools required for assembly : Phillips screwdriver

Home Styles Consumer Assistance: www.homestyles-furniture.com,
servicedesk@homestyles-furniture.com, 888-680-7460, 877-831-0319

Assembly Instructions 2/2

IMPORTANT

* Please keep Hex Wrench in a safe place as you may need to tighten up the Head Cap Bolts in the future.

* Do not tighten up all the screws until each part is properly assembled.

* Use a soft cloth between these parts and the floor.

STEP 1

Place Seat (A) upside down on a soft cloth.

Attach Legs (C) to Seat (A) with Flat Washers, Spring Washers and Head Cap Bolts (middle). (See Figure 1)

Attach Stretcher (D) to unit with Wood Screw. (See Figure 2)

Attach Leg (B) to unit with Flat Washers, Spring Washers, Head Cap Bolts (middle) and Wood Screw

Tighten Head Cap Bolts only half way.

Attach Stretchers (E) to unit with Wood Screws.

Wood Screw

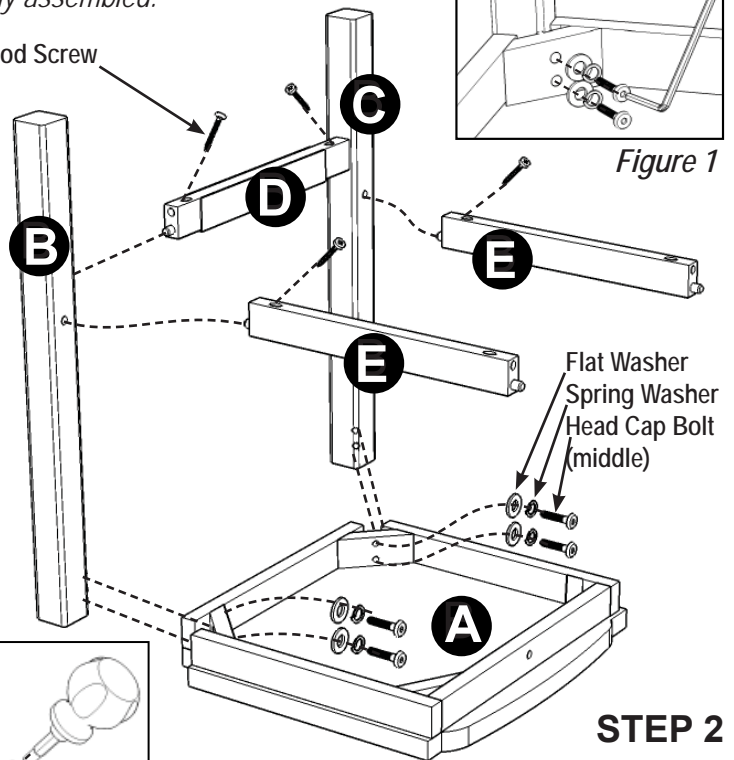


Figure 1




Figure 2

STEP 2

Attach Back Frame (F) to unit with Flat Washers, Spring Washers, Head Cap Bolt (short), Head Cap Bolts (long) and Wood Screws. (See Figures 3 and 4)

Tighten up all Head Cap Bolts.

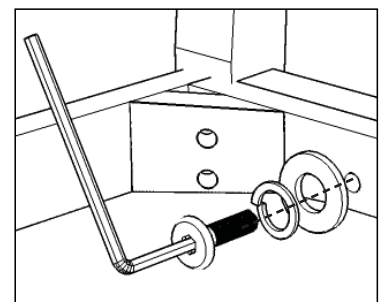


Figure 3

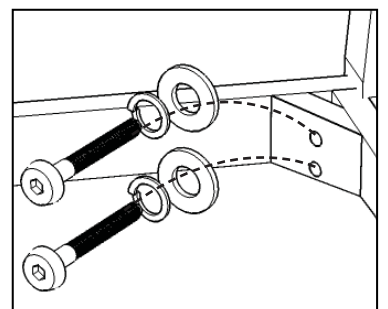


Figure 4

