

# 88 5403 50SB

## Cabana Banana II Seating


### Chair Seat and Back

#### IMPORTANT NOTE


Carefully remove all the parts from the carton and put them individually on a soft cloth to prevent scratches or other damages occuring to the wood parts.

We have taken great care in the design of this product and request that you carefully and strictly follow our assembly instructions to ensure a completed product as it was designed.


Home  
Styles

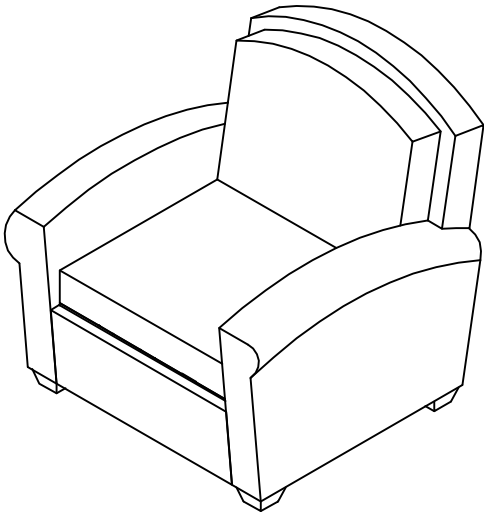


### Part List

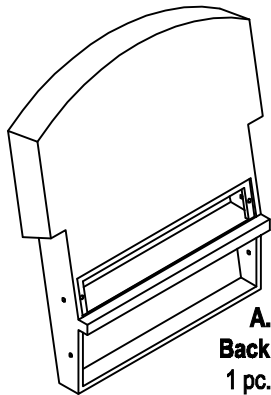


A.  
Back  
1 pc.



B.  
Front  
1 pc.




C.  
Back Cover  
1 pc.

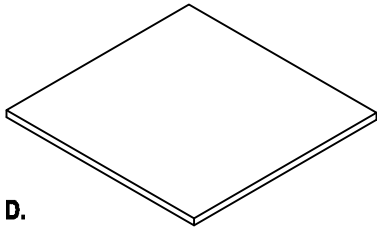

D.  
Cushion Support  
1 pc.


### Hardware List



Small Hex Wrench  
1 pc.



Allen Key  
1 pc.



Bolt  
10 pcs. (+1 extra)



Flat Washer  
10 pcs. (+1 extra)



Spring Washer  
10 pcs. (+1 extra)


For assembly also need the following :

88 5403 ARM Arm Carton


Carton quantity: 1

88 5403 CUS Cushion Carton


Carton quantity: 1




Left Arm  
1 pc.



Right Arm  
1 pc.



Back Cushion  
1 pc.

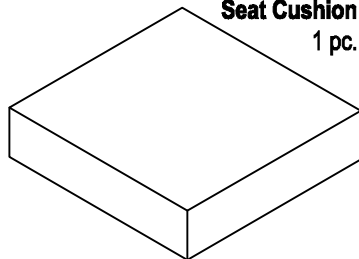

Seat Cushion  
1 pc.

Home Styles Consumer Assistance : [www.homestyles-furniture.com](http://www.homestyles-furniture.com),  
[servicedesk@homestyles-furniture.com](mailto:servicedesk@homestyles-furniture.com), 888-680-7460, 877-831-0319

## IMPORTANT

- \* Do not tighten up all the bolts until each part is properly assembled.
- \* You should keep Allen Key in a safe place as you may need to tighten up the bolts in the future.



## STEP 1

Place Left Arm on a soft cloth.

Attach Back (A) and Front (B) to Left Arm using Bolts, Spring Washers and Flat Washers.

To tighten Bolts, turn clockwise using Allen Key.



(See figure 1).

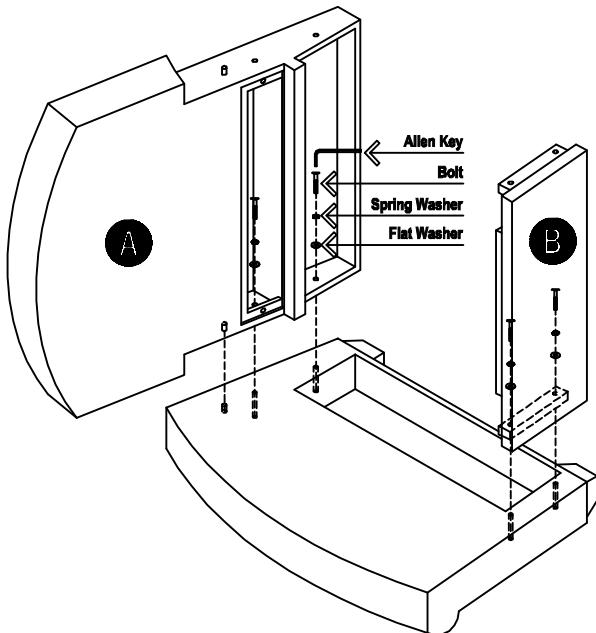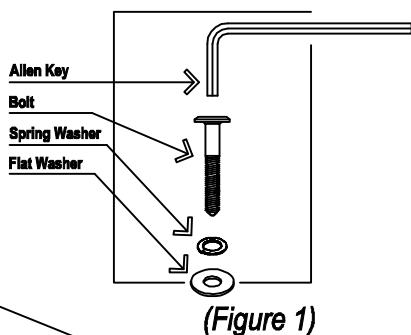

## STEP 2

Attach Back (A) and Front (B) to Right Arm using Bolts, Spring Washers and Flat Washers.

Tighten Bolts.

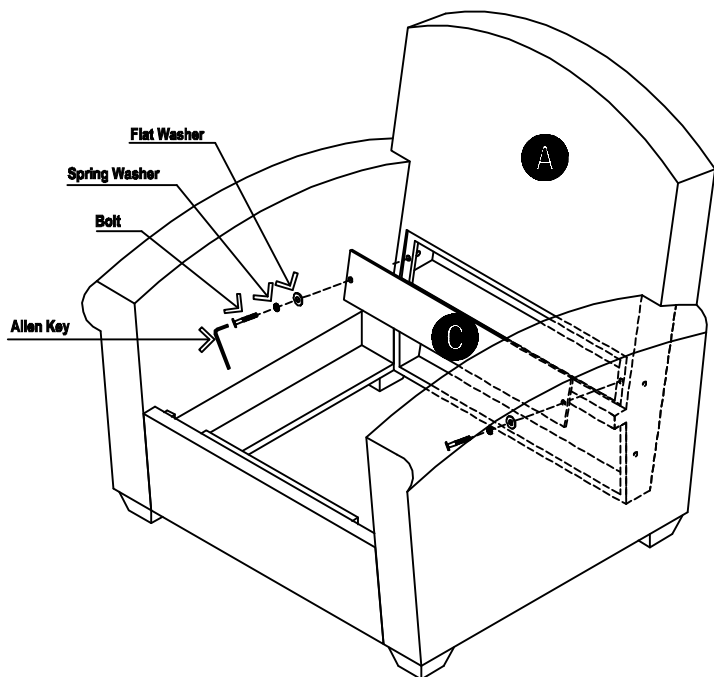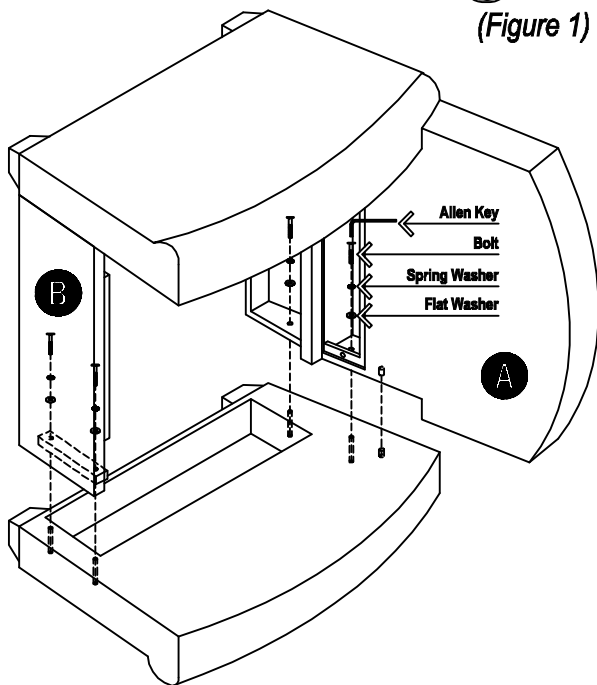



## STEP 3

Attach Back Cover (C) to Back (A) using Bolts, Spring Washers and Flat Washers.

Tighten Bolts.

## STEP 4

Place Cushion Support (D) onto unit.

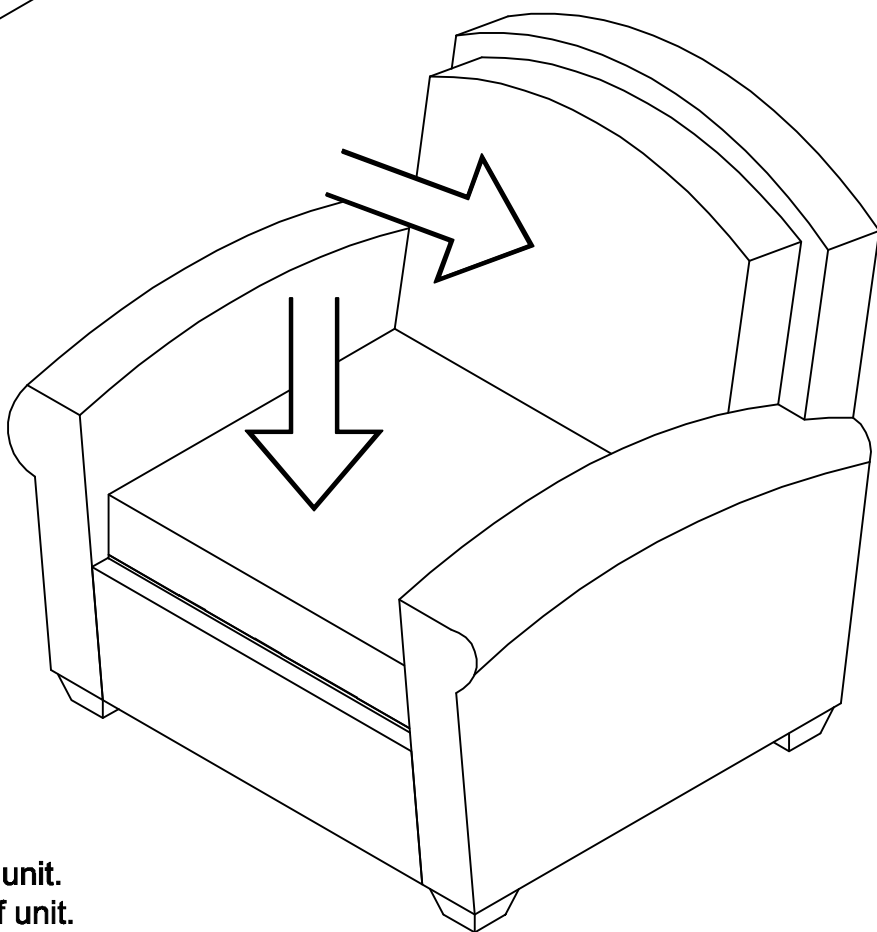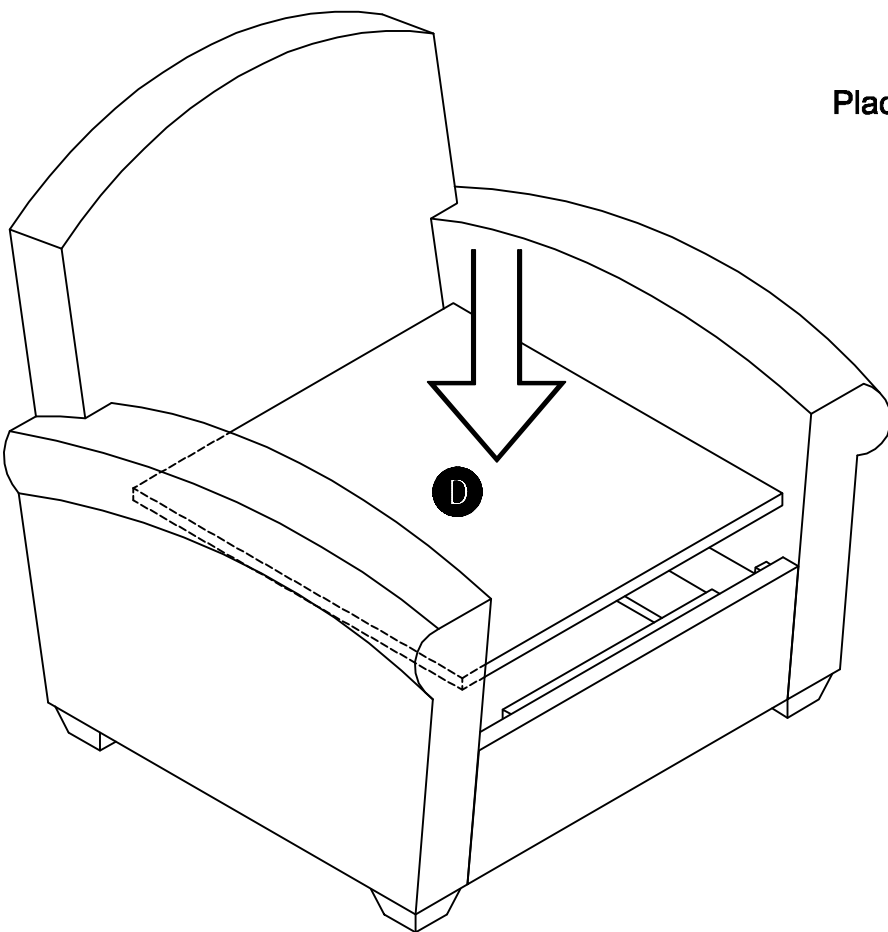

## STEP 5

Place Seat Cushion onto seat of unit.  
Place Back Cushion onto back of unit.