


# 88 5062 941 Kitchen Island

## IMPORTANT NOTE


Carefully remove all the parts from the carton and put them individually on a soft cloth to prevent scratches or other damage occurring to the parts.

We have taken great care in the design of this product and request that you carefully and strictly follow our assembly instructions to ensure a completed product as it was designed.

*Home  
Styles*

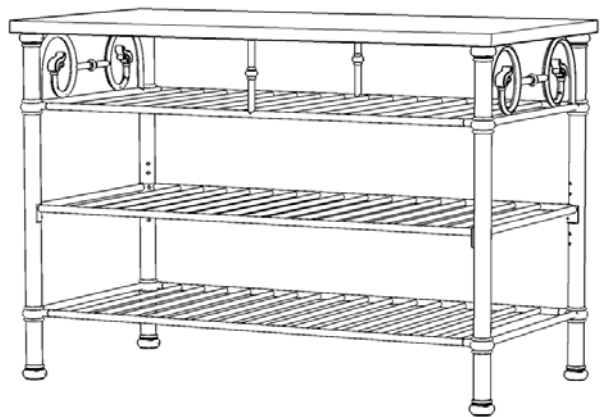


## Part List

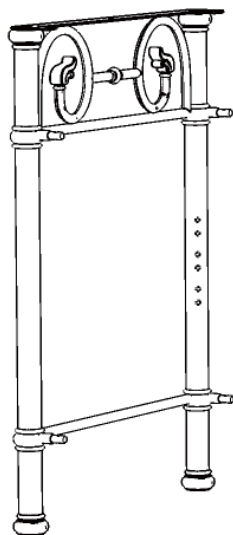


**B.  
Side Frame**  
2 pcs.




**C.  
Support**  
2 pcs.

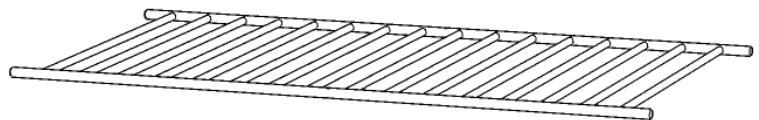

**D.  
Shelf**  
1 pc.

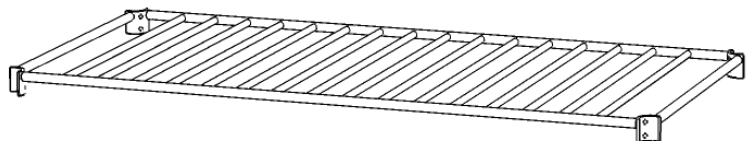

**E.  
Shelf**  
1 pc.

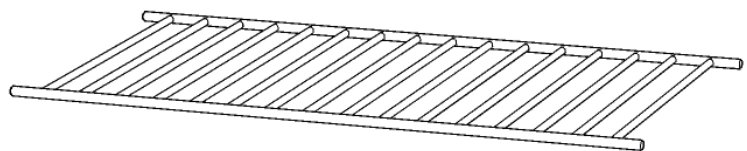

**F.  
Shelf**  
1 pc.

## Hardware List



**Hex Wrench**  
1 pc.  
**Small Wrench**  
1 pc.



**M6x38  
Tapered Head Cap Bolt  
(long)**  
2 pcs. (+1 extra)




**M6x19  
Tapered Head Cap Bolt**  
8 pcs. (+1 extra)



**M6x15  
Head Cap Bolt**  
16 pcs. (+1 extra)



**Spring Washer**  
8 pcs. (+1 extra)



**Flat Washer**  
8 pcs. (+1 extra)

**For assembly also need carton 88 5062 942 or 88 5062 943**


**Tools recommended for assembly : Level**

**Home Styles Consumer Assistance : [www.homestyles-furniture.com](http://www.homestyles-furniture.com),  
[servicedesk@homestyles-furniture.com](mailto:servicedesk@homestyles-furniture.com), 888-680-7460, 877-831-0319**

# Assembly Instructions 2/3

## IMPORTANT

- \* Please keep Hex Wrench in a safe place as you may need to tighten up the Head Cap Bolts in the future.
- \* Do not tighten up all the bolts until each part is properly assembled.
- \* Use a soft cloth between these parts and the floor.
- \* After assembly, item must be level to work properly. Use the included adjustable levelers to level.

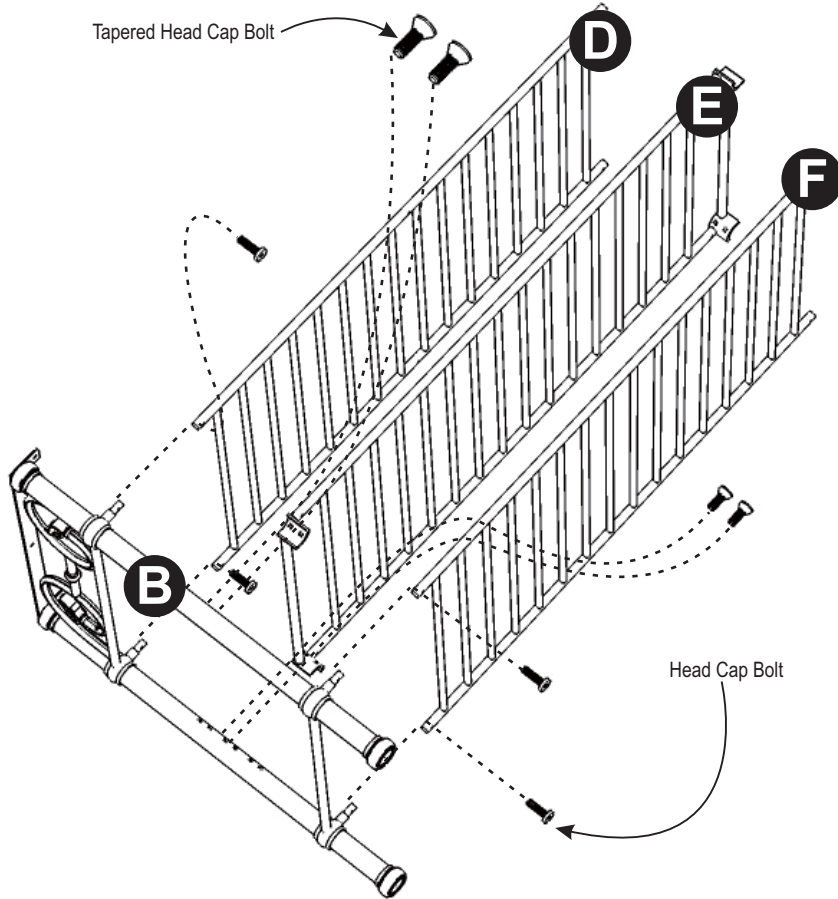

## STEP 1

Attach Shelves (D) and (F) to Side Frame (B) with Head Cap Bolts.  
(See Figure 1)

Attach Shelf (E) to unit with Tapered Head Cap Bolts at desired level. (See Figure 2)

Tighten all Bolts only half way.




Figure 1





Figure 2

## STEP 2



Attach Side Frame (B) to unit with Tapered Head Cap Bolts and Head Cap Bolts.

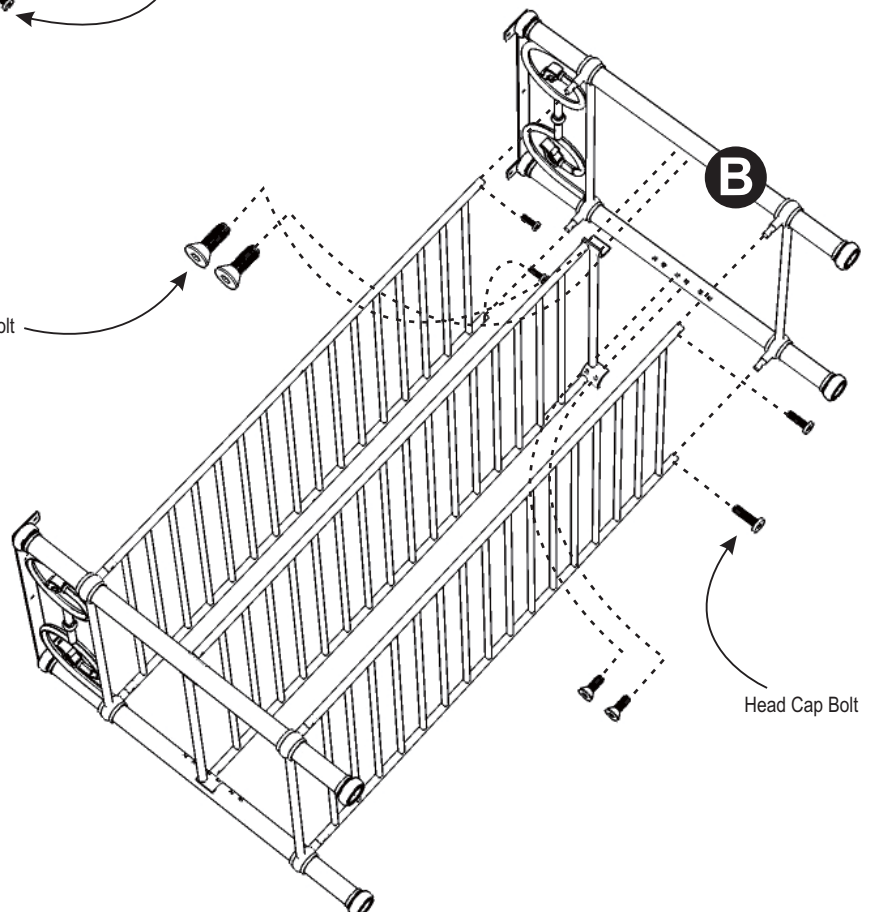

## STEP 3

Turn the unit to its' upright position.

Attach Supports (C) to unit with Tapered Head Cap Bolts (long).

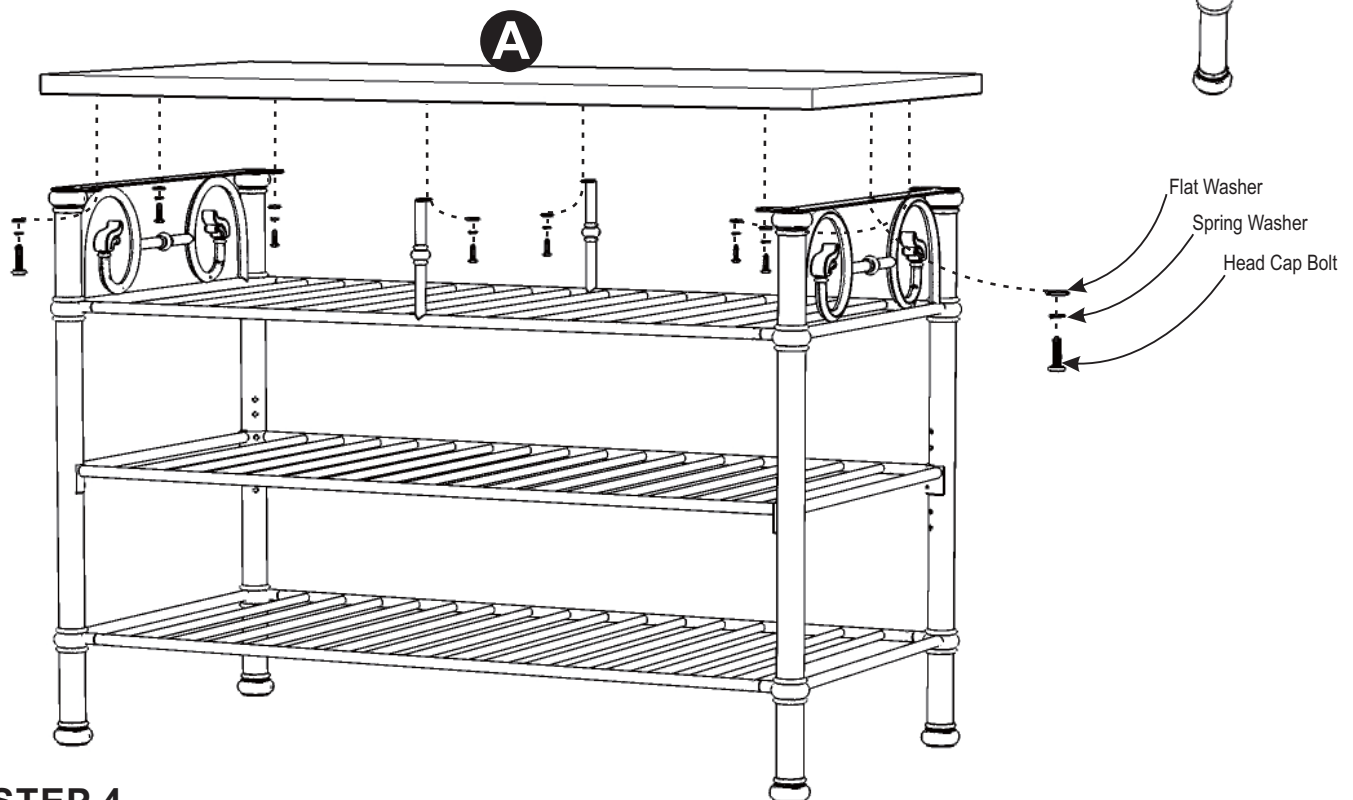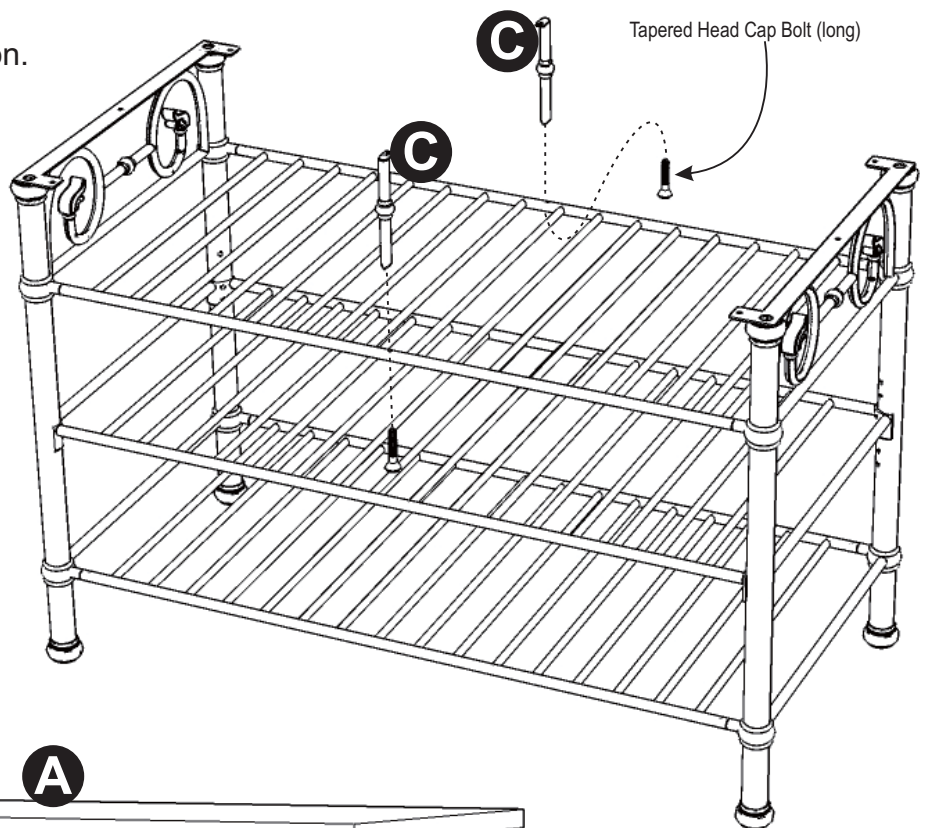


## STEP 4

Attach Top (A) to unit with Flat Washers, Spring Washers and Head Cap Bolts.

To level the unit, adjust the adjustable levelers on the bottom of unit. (See Figure 3)

Tighten all Bolts.

**Note: Unit must be level to work properly.**



**Figure 3**