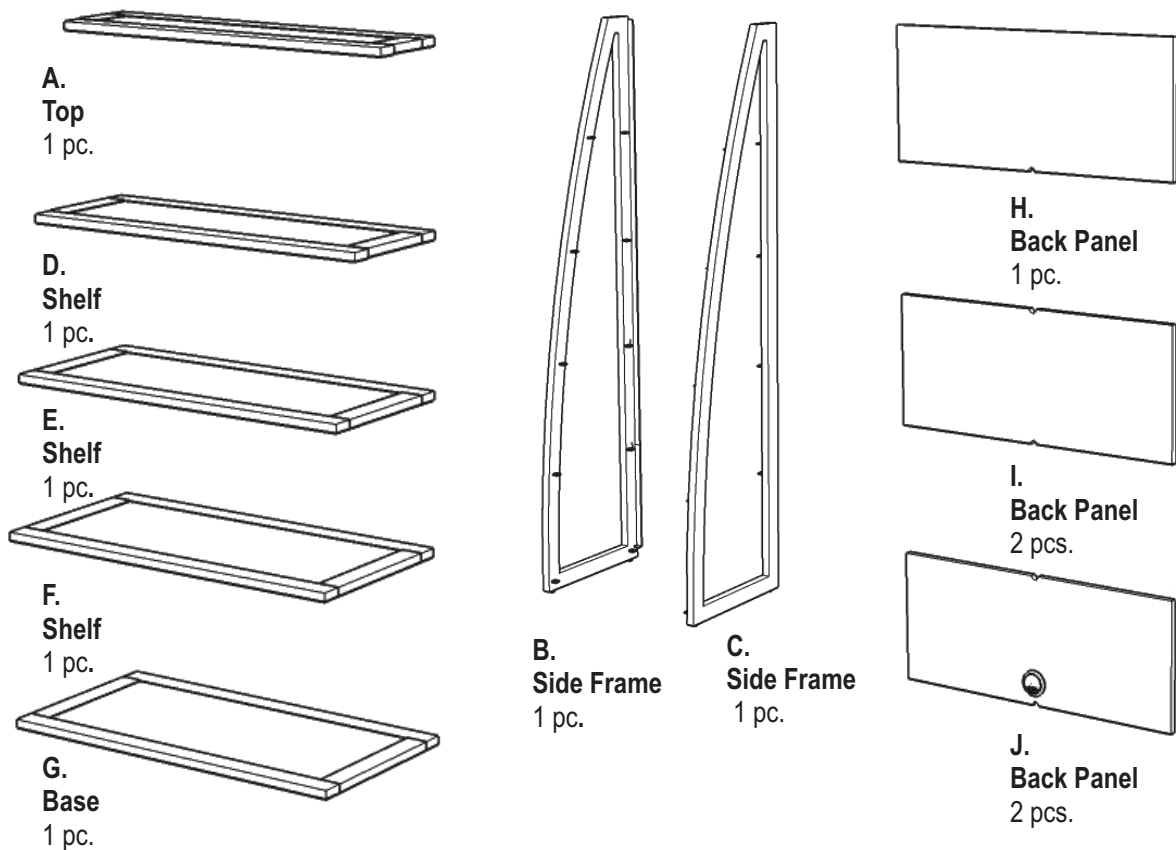# 88 5080 13
Media Tower

IMPORTANT NOTE

Carefully remove all the parts from the carton and put them individually on a soft cloth to prevent scratches or other damages occuring to the wood parts.

We have taken great care in the design of this product and request that you carefully and strictly follow our assembly instructions to ensure a completed product as it was designed.
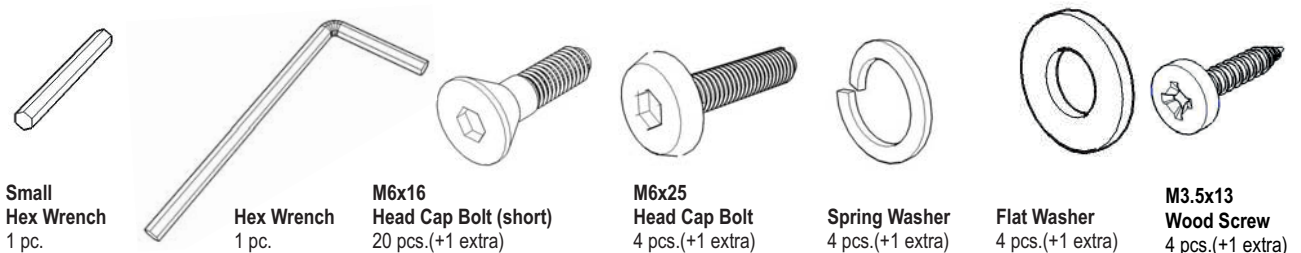
Home Styles

Part List

A.
Top
1 pc.

D.
Shelf
1 pc.

E.
Shelf
1 pc.

F.
Shelf
1 pc.

G.
Base
1 pc.

B.
Side Frame
1 pc.

C.
Side Frame
1 pc.

H.
Back Panel
1 pc.

I.
Back Panel
2 pcs.

J.
Back Panel
2 pcs.

Hardware List

| Small Hex Wrench 1 pc. | Hex Wrench 1 pc. | M6x16 Head Cap Bolt (short) 20 pcs.(+1 extra) | M6x25 Head Cap Bolt 4 pcs.(+1 extra) | Spring Washer 4 pcs.(+1 extra) | Flat Washer 4 pcs.(+1 extra) | M3.5x13 Wood Screw 4 pcs.(+1 extra) |

Tools required for assembly : *Phillips screwdriver, Drill, 3/8" Drill Bit, Level*

IMPORTANT
* Do not tighten all the Head Cap Bolts until the entire unit is properly assembled.
* You should keep Hex Wrench in a safe place as you may need to tighten up the Head Cap Bolts in the future.
* Use a soft cloth between these parts and the floor.
* After assembly, item must be level to work properly. Use the included adjustable levelers to level.
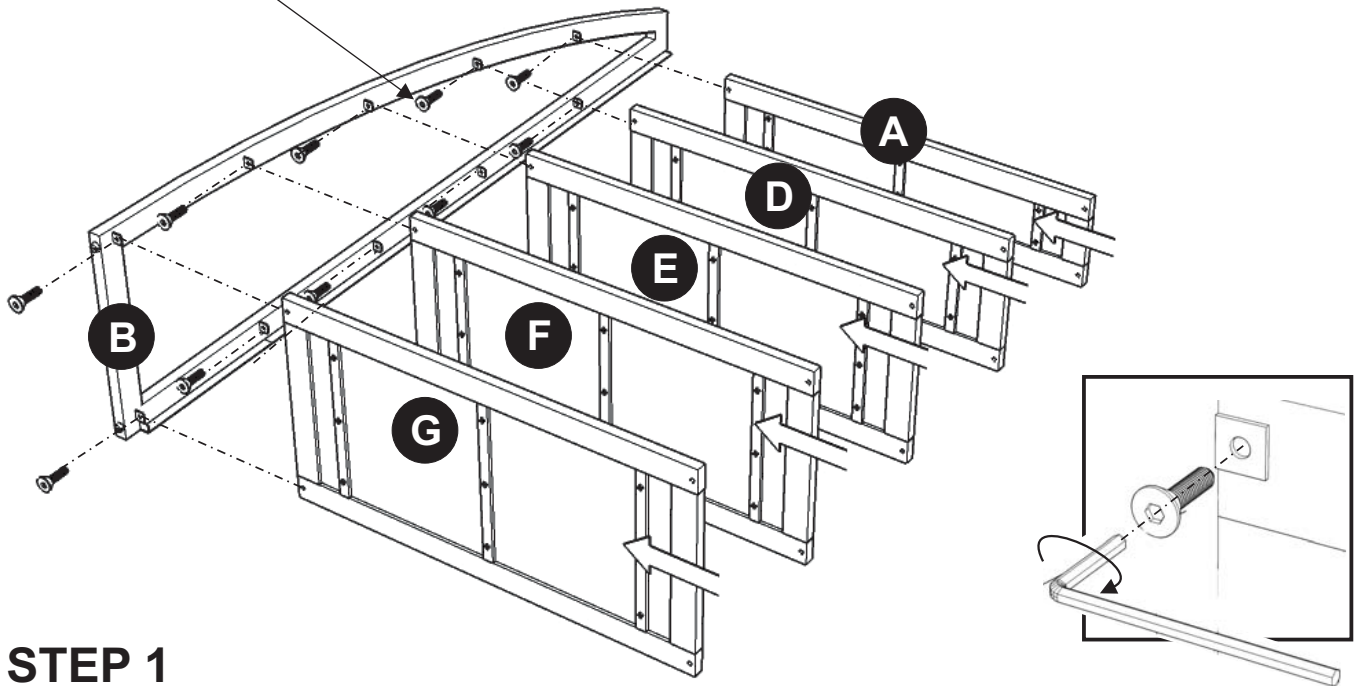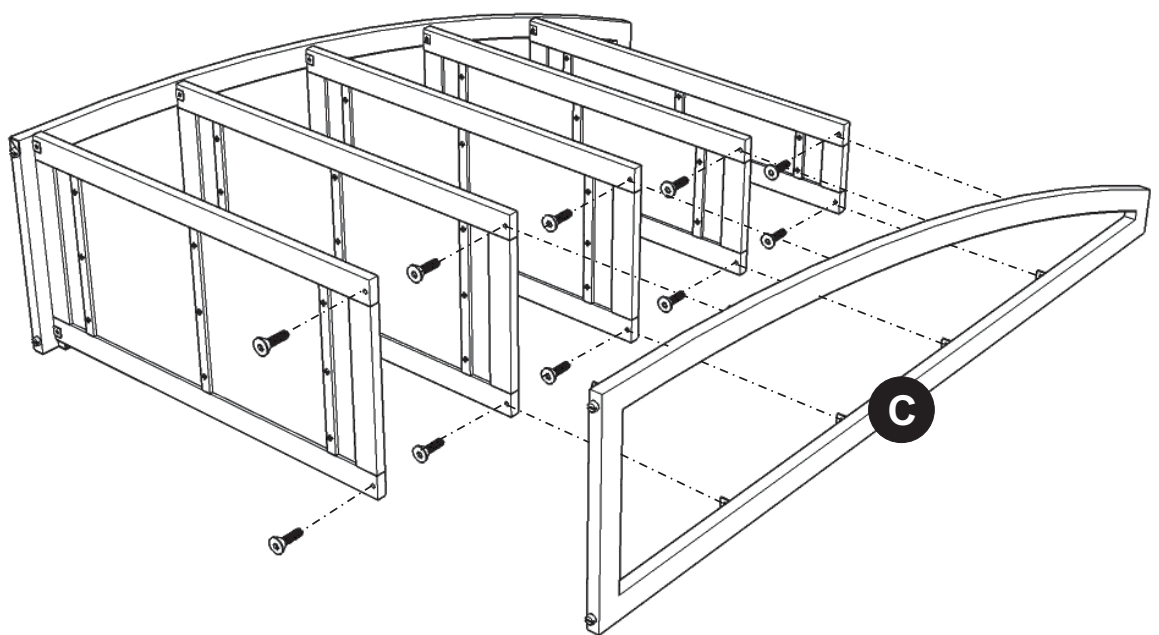
Head Cap Bolt (short)

STEP 1

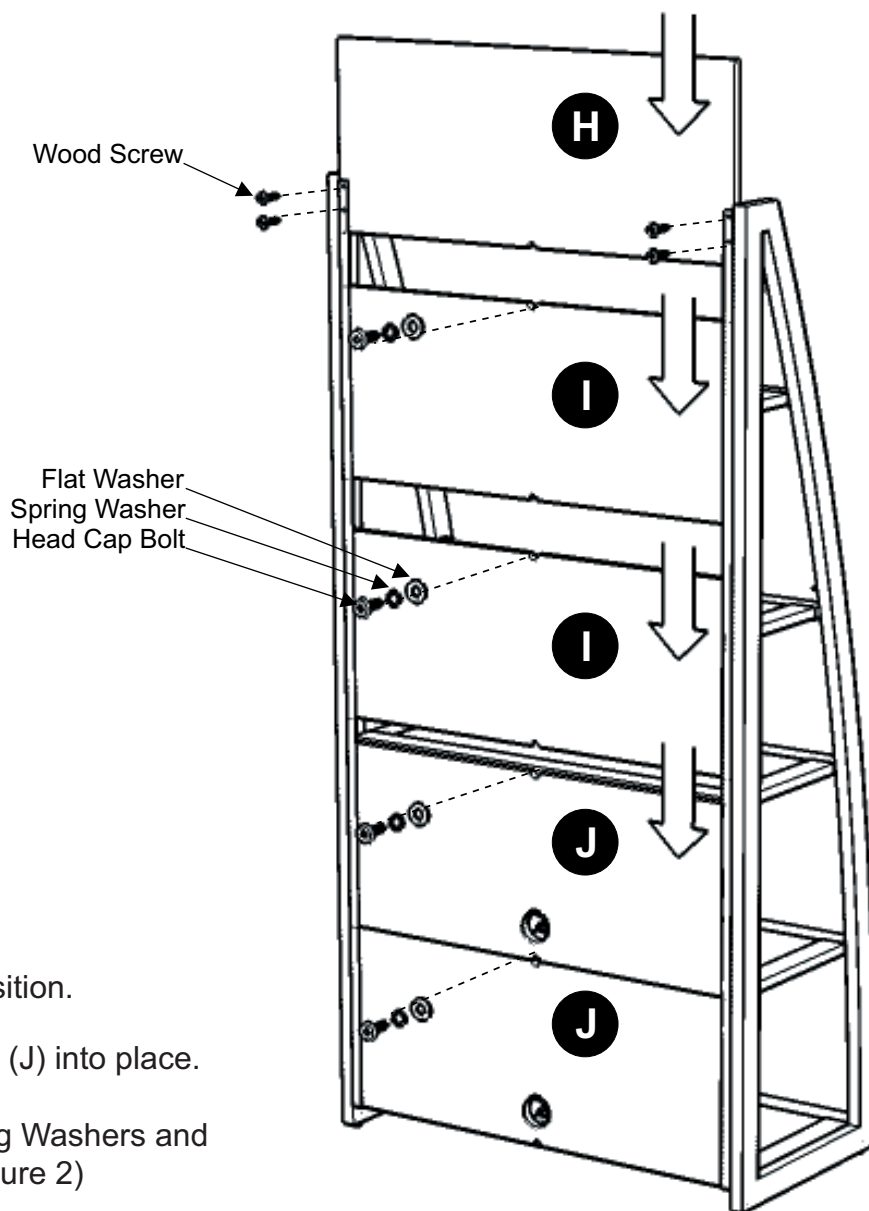Attach Top (A), Shelves (D), (E), (F) and Base (G) to Side Frame (B)
with Head Cap Bolts (short), tightening the bolts only half way.
(See Figure 1)

Figure 1

STEP 2

Attach Side Frame (C) to unit with Head Cap Bolts (short), tightening the bolts only half way.

Tighten all Head Cap Bolts used in entire assembly.

Wood Screw

H

I

I

Flat Washer
Spring Washer
Head Cap Bolt

J

J

STEP 3

Turn the unit to its' upright position.

Slide Back Panels (H), (I) and (J) into place.

Attach Head Cap Bolts, Spring Washers and Flat Washers to unit. (See Figure 2)

Attach 4X Wood Screws to unit. (See Figure 3)

To level the unit, adjust the adjustable levelers on the bottom of side frames. (See Figure 4)
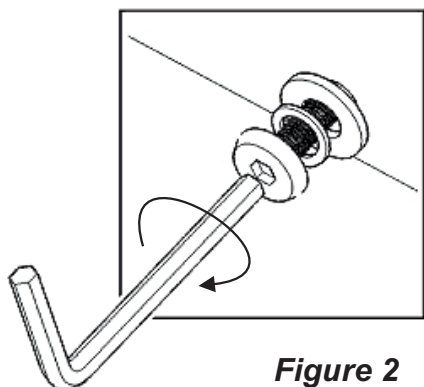
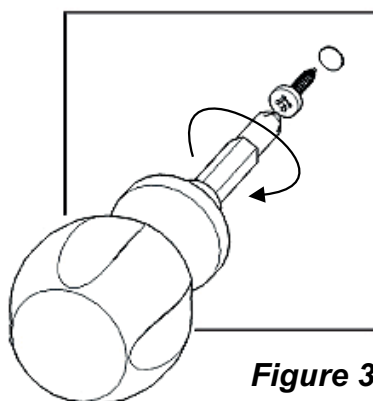**Note : Unit must be level to work properly.**

Figure 2

Figure 3

Figure 4

Attention!

To help reduce the risk of the unit tipping over, the Tipover Restraint <u>must</u> be installed following these instructions exactly!

Place unit at desired location.

Drill two 3/8″ holes in wall
at the appropriate location.

Insert Anchors into the wall holes
and attach Brackets with Wall Screws.

Attach Brackets at pre-drilled holes at top
of unit with Machine Screws.

Use Tipover Restraints to secure Brackets
on unit to Brackets on wall.
(See Figure X)

Put tie end of Tipover Restraint into loop end
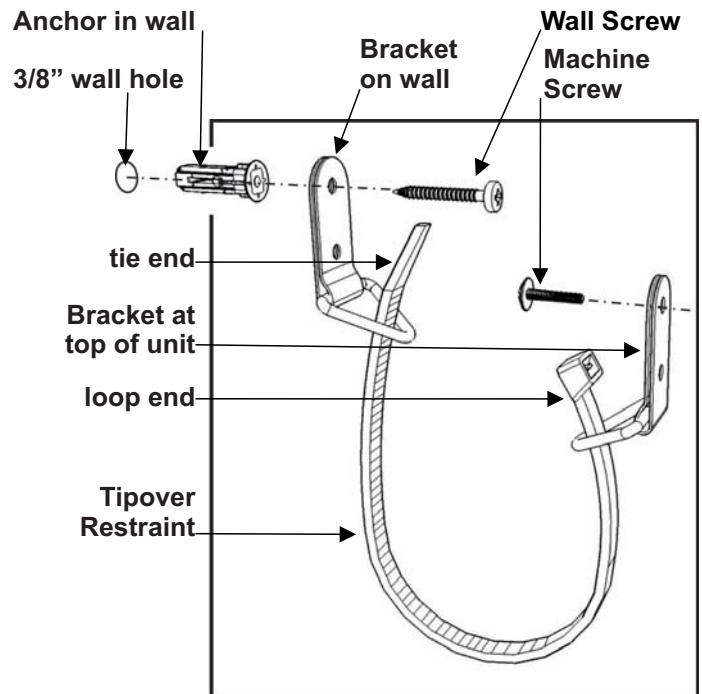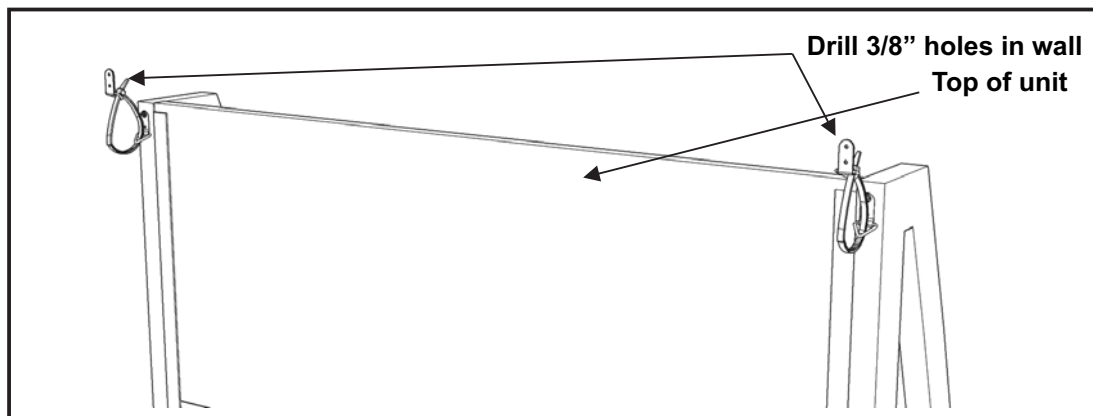of Tipover Restraint and pull until tight.

Anchor in wall

3/8" wall hole

Bracket on wall

Wall Screw
Machine Screw

tie end

Bracket at top of unit

loop end

Tipover Restraint

Figure X

Drill 3/8" holes in wall
Top of unit

Hardware List

Anchor	Bracket	Tipover Restraint	M3.5x40 Wall Screw	M4x16 Machine Screw
2 pcs.(+1 extra)	4 pcs.(+1 extra)	2 pcs.(+1 extra)	2 pcs.(+1 extra)	2 pcs.(+1 extra)